

FORGED STEEL GLOBE VALVE

LEHRY Forged Steel Globe Valve Suitable for Steam, Water, Oil Application.

Technical Data:-

- ❖ Size Range : ½" (15 mm) to 2" (50 mm)
- ❖ Class : 800# to 2500#

Hydraulic Test Pressure : -

Class	800#	1500#	2500#
BODY	3000 PSIG	5400 PSIG	9000 PSIG
SEAT	2000 PSIG	4000 PSIG	6600 PSIG

Standards : -

Manufacturing	API 602 / BS 5352
End Connection	Screwed Ends to BSP (F) Socket Weld Ends to ANSI B16.11
Inspection & Testing Std	API 598/BS 6755 (Part-I)

Dimensions (All Dimensions are in mm)

Size	800#	1500#	2500#
	L Face to Face - SCR/SW	L Face to Face - SCR/SW	L Face to Face - SCR/SW
15	85	92	104
20	92	104	127
25	104	127	140
40	127	140	-
50	140	-	-

Technical Data:-

- ❖ Size Range : ½" (15 mm) to 2" (50 mm)
- ❖ Class : 150# to 600#

Hydraulic Test Pressure : -

Class	150#	300#	600#
BODY	3000 PSIG	5400 PSIG	9000 PSIG
SEAT	2000 PSIG	4000 PSIG	6600 PSIG

Standards : -




Manufacturing	BS 5352
STD Face to Face	ANSI B16.10
End Connection	Flanged Ends to ANSI B 16.5 RF
Inspection & Testing Std	API 598/BS 6755 (Part-I)
Type	OS & Y Type

Dimensions (All Dimensions are in mm)

Size	150#	300#	600#
	L Face to Face – RF	L Face to Face – RF	L Face to Face – RF
15	107.9	152.4	165.1
20	117.3	177.8	190.5
25	127	203.2	215.9
32	139.7	215.9	228.6
40	165.1	228.6	241.3
50	203.2	266.7	292.1

Available Option :-

Structure	End Connection	Flanged End, Screwed End, Socket Weld
	Operation	Handwheel or As per Requirement
Material	Body / Bonnet	ASTM A105 / A182 F11 / F22 / F304 / F316 / F304L / F316L / A350 LF2
	Trims	13% Cr. Steel to AISI 410 / 304 / 316 / 304L / 316L / Stellite

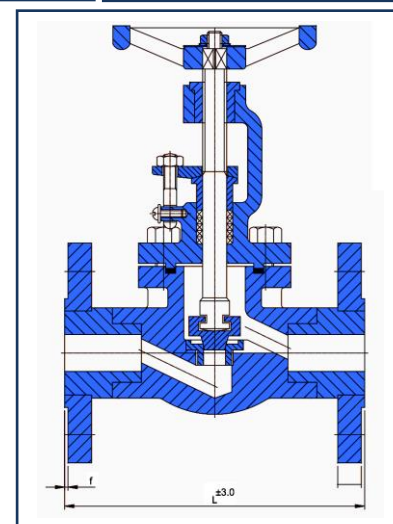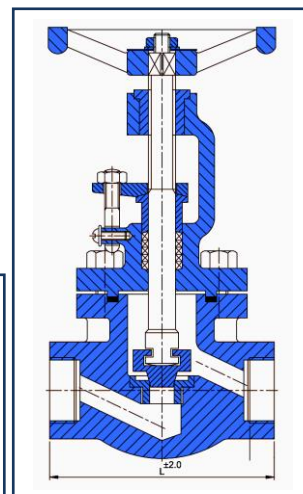

Lehry Instrumentation & Valves Pvt. Ltd.,

"Lehry Chambers" #78 (Old No: 51) Sembudoss Street,
P.B No.1506, Parrys, Chennai - 600 001.
Phone : 044 25226995/25225185/25226187/42163823/
42625620/42625621. Fax : 044 25231715
Email : info@lehry.com / Website : www.lehryvalves.com
Branches : Chennai, Bangalore, Hyderabad, Mumbai, Noida, Pune