

BRONZE Y-TYPE STRAINER

LEHRY Bronze Y-Type strainers are manufactured with Brass/S.S. (AISI-304) screen with screwed female ends to BSP Taper Threads or flanged ends to BS-10 –Table H. These strainers are suitable for 250 PSiG (17.58 Kg/Cm²g) max. steam pressure at 428°F (220°C) temp and are tested to 500 PSiG (35.15 Kg/Cm²g) Hydraulic Pressure.


SALIENT FEATURES :-

- ❖ Fine finish and smooth contours reduce pressure drop in the strainer.
- ❖ Large screening area makes the strainer efficient.
- ❖ Screen is guided in the body.
- ❖ Strainer may be installed in the down ward vertical lines with effectiveness equal to horizontal installation.




Specification :-

SL.No	Description	Material
1	Body	Bronze
2	Strainer	S.S
3	Gasket	C.A.F
4	Cover	Bronze

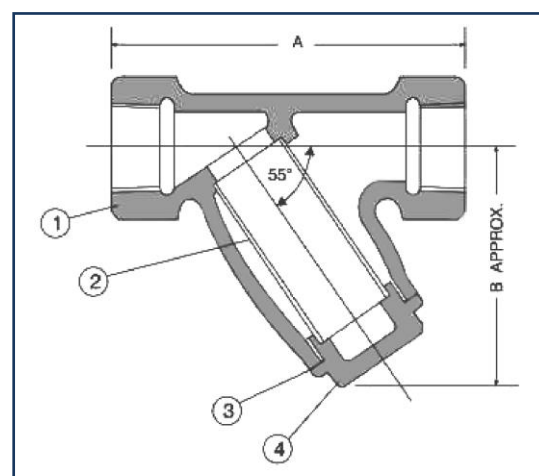

Dimensions : (All Dimensions are in mm)

Size		A	B	C	D	E	F
Inch	DN						
1/2"	15mm	70	54	130	84	9.5	114.3
3/4"	20mm	98.5	64	133	90	9.5	114.3
1"	25mm	127	90	155	112	11.2	120.7
1-1/4"	32mm	156	110	184	112	11.2	133.4
1-1/2"	40mm	178	140	190.4	150	12.7	139.7
2"	50mm	222	160	219	170	12.7	165.1
2-1/2"	65mm	-	-	241	229	14.29	184.2
3"	80mm	-	-	263.5	257	15.88	203.2
4"	100mm	-	-	371.5	270	19.01	228.6

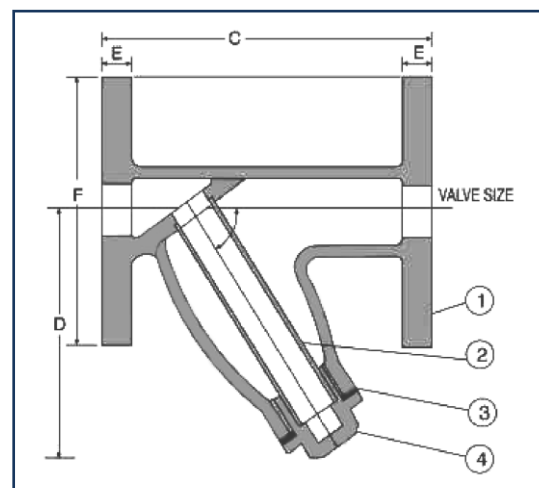

Lehry Instrumentation & Valves Pvt. Ltd.,

"Lehry Chambers" #78 (Old No: 51) Sembudoss Street,
P.B No.1506, Parrys, Chennai - 600 001.
Phone : 044 25226995/25225185/25226187/42163823/
42625620/42625621. Fax : 044 25231715
Email : info@lehry.com / Website : www.lehryvalves.com
Branches : Chennai, Bangalore, Hyderabad, Mumbai, Noida, Pune