

DUAL PLATE CHECK VALVE-(N.R.V)

DESCRIPTION: -


Dual Plate Check valve is a purpose non return valve that is much stronger, lighter in weight and smaller in size as compared to conventional swing check valve or lift check valve. This design has distinct advantages over conventional swing check valve.

MATERIALS

S.No.	Name of Parts	Material
1	Body	C.I. / CF8 / CF8M / WCB
2	Linner	Nitrile/EPDM
3	Plate LH	D.I. / CF8 / CF8M
4	Plate RH	D.I. / CF8 / CF8M
5	Hinge Pin	AISI 304/ AISI 316
6	Stopper Pin	AISI 304/ AISI 316
7	Spring	SS 304
8	Ring	SS 304
9	Seal	Nitrile/EPDM
10	Plug	Mild Steel

DIMENSIONS IN MM

DN Size	OUTER DIA	FACE TO FACE	INNER DIA
50	95	54	60
65	110	54	73
80	130	57	89
100	160	64	114
125	188	70	141
150	212	76	168
200	280	95	219
250	340	108	273
300	410	143	324
400	On Request	On Request	On Request
500	On Request	On Request	On Request
600	On Request	On Request	On Request

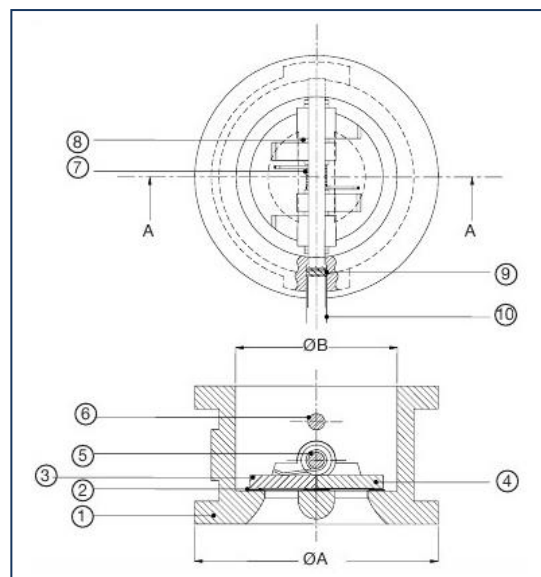

HYDROSTATIC TEST PRESSURE

Availability	Size Range	Temperature Rating	Hydrostatic Test Pressure	
			Body	Seat
Standard Supply	50 to 600 mm	-10°C to 90°C	15 Kg./cm ²	10 Kg./cm ²
	50 to 300 mm	-10°C to 90°C	24 Kg./cm ²	16 Kg./cm ²

Lehry Instrumentation & Valves Pvt. Ltd.,

"Lehry Chambers" #78 (Old No: 51) Sembudoss Street,
P.B No.1506, Parrys, Chennai - 600 001.

Phone : 044 25226995/25225185/25226187/42163823/
42625620/42625621. Fax : 044 25231715

Email : info@lehry.com / Website : www.lehryvalves.com

Branches : Chennai, Bangalore, Hyderabad, Mumbai, Noida, Pune